

Data sheet

Pressure transmitters Type AKS 32 and AKS 33

Introduction

AKS 32 and AKS 33 are pressure transmitters that measure a pressure and convert the measured value to a standard signal:

- 1 → 5 V d.c. or 0 → 10 V d.c. for AKS 32
- 4 → 20 mA for AKS 33

A robust design makes the AKS very suitable for application within a number of fields e.g.

- Air conditioning systems
- Refrigeration plant
- Process control
- Laboratories



Features

Highly developed sensor technology means high pressure regulation accuracy, a very important factor in the precise and energy-economic capacity regulation of refrigeration plant.

- Temperature compensation for LP and HP pressure transmitters, developed specially for refrigeration plant:
LP: -30 → +40°C (\leq 16 bar)
HP: 0 → +80°C ($>$ 16 bar)
- Compatibility with all refrigerants incl. ammonia means less stock and greater application flexibility.
- Built-in voltage stabiliser, i.e. the AKS pressure transmitters can be powered from an unregulated voltage supply of any output within given limits.

- Effective protection against moisture means that the sensor can be mounted in very harsh environments, e.g. in the suction line encapsulated in an ice block.
- Robust construction gives protection against mechanical influences such as shock, vibration and pressure surge. AKS sensors can be mounted direct on to the plant.
- No adjustment necessary. With the highly developed sensor technology and sealed gauge principle, the accuracy of the factory setting is maintained independent of variations in ambient temperature and atmospheric pressure. This is very important when ensuring evaporating pressure control in air conditioning and refrigeration applications.
- EMC protection according to EU EMC-directive (CE-marked)
- Polarity protected inputs.

Technical data
Performance

Accuracy (3 σ)	±0.3% FS (typ.)/±0.8% FS (max.)
Non-linearity (Best fit straight line)	< ±0.2% FS
Hysteresis and repeatability	≤ ±0.1% FS
Thermal zero point shift	≤ ±0.1% FS/10K (typ.) ≤ ±0.2 %FS/10K (max.)
Thermal sensitivity (span) shift	≤ ±0.1% FS/10K (typ.) ≤ ±0.2 %FS/10K (max)
Response time	< 4 ms
Max. operating pressure	See ordering, overleaf
Burst pressure	min. 300 bar

Electrical specifications for AKS 33, 4 - 20 mA output signal

Rated output signal	4 to 20 mA
Supply voltage, V_{supply} (polarity protected)	10 to 30 V d.c.
Voltage dependency	< 0.05% FS/10 V
Current limitation (linear output signal up to $1.5 \times$ rated range)	28 mA
Max. load, R_L	$R_L \leq \frac{V_{\text{supply}} - 10 \text{ V}}{0.02 \text{ A}} [\Omega]$

Electrical specifications for AKS 32, 0 - 10 V d.c. output signal

Rated output signal (short-circuit protected)	0 to 10 V d.c.
Supply voltage, V_{supply} (polarity protected)	15 to 30 V d.c.
Supply current consumption	< 8 mA
Supply voltage dependency	< 0.05% FS/10 V
Output impedance	< 25 Ω
Load resistance, R_L	$R_L \geq 10 \text{ k}\Omega$

Electrical specifications for AKS 32, 1-5 V d.c. output signal

Rated output signal (short-circuit protected)	1 to 5 V d.c.
Supply voltage, V_{supply} (polarity protected)	9 to 30 V d.c.
Supply current consumption	< 5 mA
Supply voltage dependency	< 0.05% FS/10 V
Output impedance	< 25 Ω
Load resistance, R_L	$R_L \geq 10 \text{ k}\Omega$

Environmental conditions

Operating temperature range	-40 to 85°C		
Compensated temperature range	LP:-30 to +40°C / HP:0 to +80°C		
Transport temperature range	-50 to 85°C		
EMC - Emission	EN 50081-1		
	Electrostatic discharge	Air 8 kV	EN 50082-2 (IEC 801-2)
		Contact 4 kV	EN 50082-2 (IEC 801-2)
EMC - Immunity	RF field	10 V/m, 26 MHz - 1 GHz	EN 50082-2 (IEC 801-3)
	RF conducted	3 V _{rms} , 150 kHz - 30 MHz	EN 50082-2 (IEC 801-6)
	Transient	burst 4 kV (CM)	EN 50082-2 (IEC 801-4)
		surge 1 kV (CM,DM)	EN 50082-2 (IEC 801-5)
Insulation resistance			> 100 MΩ at 500 V d.c.
Mains frequency test	500 V, 50 Hz		SEN 361503
Vibration stability	Sinusoidal	20 g, 25 Hz - 2 kHz	IEC 68-2-6
	Random	7,5 g _{rms} , 5 Hz - 1 kHz	IEC 68-2-34, IEC 68-2-36
Shock resistance	Shock	500 g / 1 ms	IEC 68-2-27
	Free fall		IEC 68-2-32
Enclosure	Plug version		IP 65 - IEC 529
	Cable version		IP 67 - IEC 529

Mechanical characteristics

Housing material and material in contact with medium	DIN 17440-1.4404 (AISI 316L)
Weight	0.3 kg

Ordering
AKS 32, version 1 → 5 V

Operating range bar	Max. working pressure PB bar	Compensated temperature range °C	Code no.					
			DIN 43650 plug			Cable		
			1/4 NPT ¹⁾	G 3/8 A ²⁾	1/4 flare ³⁾	1/4 NPT ¹⁾	1/4 flare ³⁾	
LP	-1 → 6	33	-30 → +40	060G2000	060G2004	060G2068		
	-1 → 12	33	-30 → +40	060G2001	060G2005	060G2069	060G2017	060G2073
HP	-1 → 20	40	0 → +80	060G2002	060G2006	060G2070		
	-1 → 34	55	0 → +80	060G2003	060G2007	060G2071		

AKS 32, version 0 → 10 V

Operating range bar	Max. working pressure PB bar	Compensated temperature range °C	Code no.			
			DIN 43650 plug			
			1/4 NPT ¹⁾	G 3/8 A ²⁾	1/4 flare ³⁾	
LP	-1 → 5	33	-30 → +40		060G2038	
	-1 → 9	33	-30 → +40	060G2013	060G2036	060G2082
HP	-1 → 24	40	0 → +80	060G2014	060G2037	060G2083
	-1 → 39	60	0 → +80	060G2080	060G2079	060G2084

AKS 33, version 4 → 20 mA

Operating range bar	Max. working pressure PB bar	Compensated temperature range °C	Code no.					
			DIN 43650 plug			Cable		
			1/4 NPT ¹⁾	G 3/8 A ²⁾	1/4 flare ³⁾	1/4 NPT ¹⁾	G 3/8 A ²⁾	1/4 flare ³⁾
LP	-1 → 5	33	-30 → +40	060G2112	060G2108	060G2047		
	-1 → 6	33	-30 → +40	060G2100	060G2104	060G2048	060G2116	060G2120
	-1 → 9	33	-30 → +40	060G2113	060G2111	060G2044		060G2062
	-1 → 12	33	-30 → +40	060G2101	060G2105	060G2049	060G2117	
	-1 → 20	40	0 → +80	060G2102	060G2106	060G2050	060G2118	
HP	-1 → 34	55	0 → +80	060G2103	060G2107	060G2051	060G2119	060G2065
	0 → 16	40	0 → +80	060G2114	060G2109			
	0 → 25	40	0 → +80	060G2115	060G2110			060G2127
								060G2067


¹⁾ 1/4-18 NPT

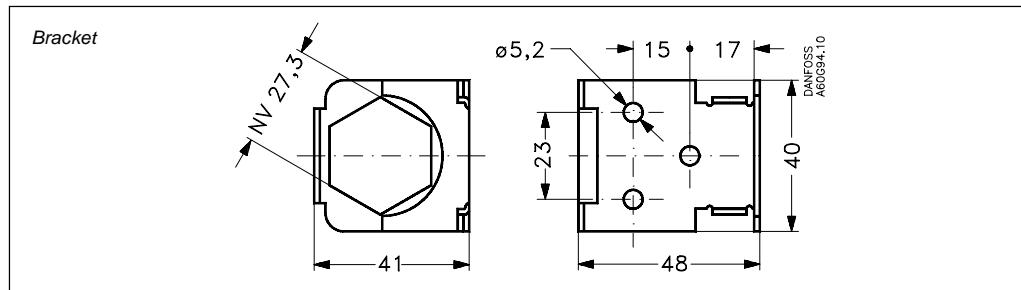
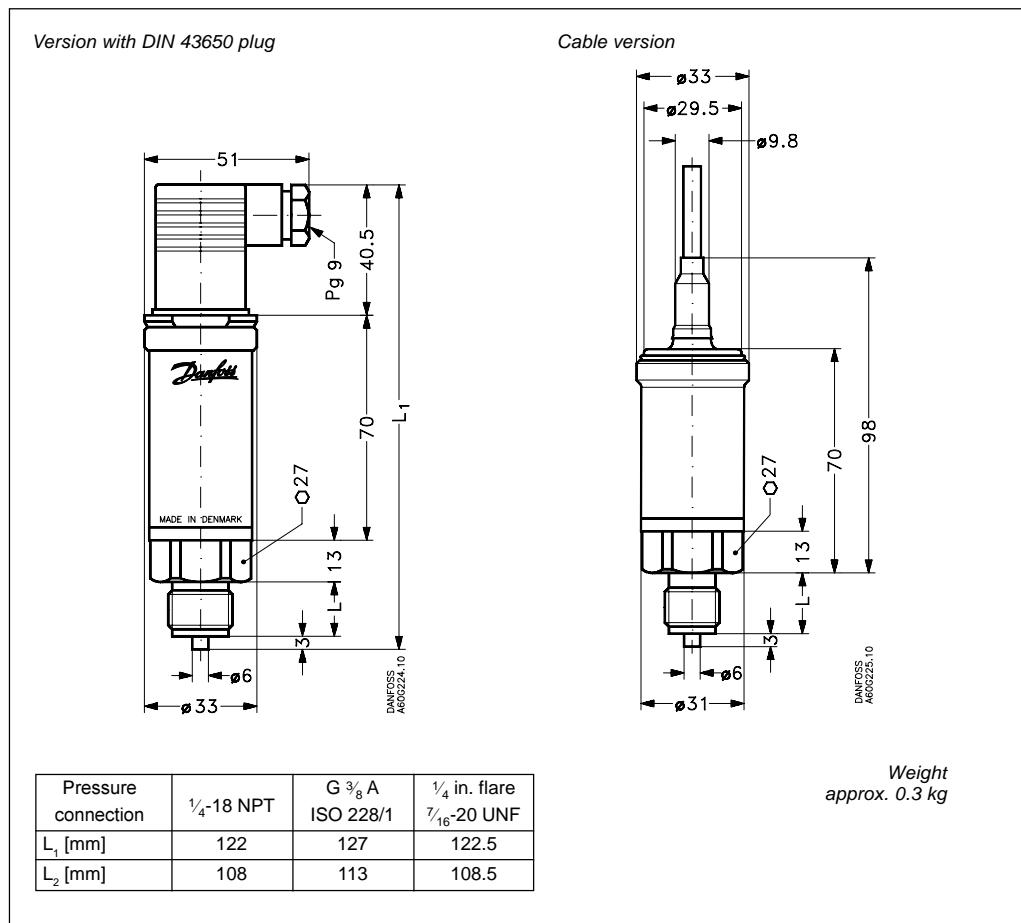
²⁾ Thread ISO 228/1 - G 3/8 A (BSP)

³⁾ 7/16-20 UNF

Is also available in US-version (1 → 6 V) and with 1/8-27 NPT connection. Please contact Danfoss

Accessories

 AKS 32, AKS 33							
<table border="1"> <tbody> <tr> <td>Description</td> <td>Code no.</td> </tr> <tr> <td>Mounting bracket</td> <td>060G0213</td> </tr> <tr> <td>10 pcs. aluminium gaskets for G 3/8 A thread</td> <td>060B1208</td> </tr> </tbody> </table>		Description	Code no.	Mounting bracket	060G0213	10 pcs. aluminium gaskets for G 3/8 A thread	060B1208
Description	Code no.						
Mounting bracket	060G0213						
10 pcs. aluminium gaskets for G 3/8 A thread	060B1208						

Dimensions and weights


Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.



**DK-6430 Nordborg
Denmark**